



**TEREX®**

**TC14-2**

# Mini Excavator



The machine shown may include optional equipment.

## Specifications

Operating weight	1500 kg
Engine power	10.4 kW (14.1 HP)
Bucket capacity	21 – 91 l
Digging depth	2.26 m
Reach	3.76 m

## Features

- ▶ Extra-wide blade for dozer applications
- ▶ Top-mounted boom cylinders for perfect protection of cylinders and larger range of application
- ▶ Canopy with excellent visibility (cab as option)
- ▶ Knickmatik® allows for working closely along walls
- ▶ Wide range of proven working tools

**WORKS FOR YOU.™**

# SPECIFICATIONS

## ENGINE

Manufacturer, model	Kubota, D722 Tier 4 final
Type	3-cylinder diesel engine
Bore x stroke	67 x 68 mm
Displacement	719 cm³
Power rating acc. to ISO 14396 @ 2500 rpm	10.4 kW (14.1 HP)
Torque max. @ 2000 rpm	43.5 Nm
Air filter with safety cartridge and maintenance switch	
Cold-starting aid	Glow plugs

## ELECTRICAL SYSTEM

Nominal voltage	12 V
Battery	12 V / 44 Ah
Generator	12 V / 40 A
Starter	1.4 kW
Lighting system:	1 work light front left on the cab / canopy (auxiliary headlamps optional)

## TRANSMISSION

Single-stage hydrostatic travel drive with axial piston motor and reduction gear, fully enclosed. "Straight-Travel" function. Travel brake valves for downhill travel	
Travel speed, forward and reverse	0 – 1.8 kph

## UNDERCARRIAGE

Torsion-proof welded design. Mechanically retractable/extendable undercarriage provided as standard. Maintenance-free crawler-type undercarriage. Idler suspension with hydraulic crawler-chain tensioning. Sliding plate at the top	
Range of adjustment, outside edge of crawler chains	990 – 1340 mm
Width rubber tracks (short pitch)	230 mm
Total length (undercarriage)	1490 mm
Number of rollers per side	3
Track width	760 – 1110 mm
Gradeability	max. 60%
Drawbar pull	1300 daN

## DOZER BLADE

Independent of drive train, sensitive control via separate hand lever	
Width x height	1340 x 235 mm
Dozer cut below ground	160 mm
Dozer lift above ground	200 mm
Slope angle	25°

## STEERING

Independent individual control of crawler chains, also counterwise. Sensitive actuation via manual levers, combined with pedals, foot rest on pedal console	
---	--

## SWING SYSTEM

Internally toothed ring gear	
Swing speed	0-9 rpm

## SWING BRAKE

Hydrostatic drive, also acts as wear-resistant brake. Additional spring-loaded multi-disc brake. Considered as transport security	
---	--



## FLUID CAPACITIES

Fuel tank	27 l
Hydraulic system (incl. tank 21 l)	26 l

## KNICKMATIK®

Lateral parallel adjustment of boom arrangement at full dig depth	
Angle of articulation / lateral adjustment left	59° / 411 mm
Angle of articulation / lateral adjustment right	60° / 503 mm

## OPERATING DATA, STANDARD EQUIPMENT

Operating weight according to ISO 6016: Canopy with 400 mm bucket, rubber tracks, additional control circuit, including driver, full fuel tank	1500 kg
Operating weight according to ISO 6016: Cab with 400 mm bucket, rubber tracks, additional control circuit, including driver, full fuel tank	1610 kg
Transport weight: Canopy, tank half full, w/out bucket	1390 kg
Transport weight: Cab, tank half full, w/out bucket	1500 kg
Total length (travel position)	2621 mm
Total length (trailer transport position)	3653 mm
Total height (top of canopy/cab)	2273 mm / 2291 mm
Total height (travel position)	2315 mm
Total width (undercarriage)	990 – 1340 mm
Total width of uppercarriage	980 mm
Uppercarriage tail swing	1090 mm
Uppercarriage front swing	1295 mm
Working envelope, bucket heaped (also with 600 mm bucket):	
180°	2388 mm
360°	2596 mm
Swing clearance	443 mm
Reach max.	3760 mm
Digging depth max.*	2257 mm
Loading height approx. *	2276 mm
Highest reachable height*	3339 mm
Bucket rotation angle	187°
Bucket digging force acc. to ISO 6015	16,590 N
Stick digging force acc. to ISO 6015	9750 N
Specific ground pressure:	
Excavator cpl. **	0.26 daN/cm²

\* Dimensions apply to machine standing on level ground, but can be increased by tilting the machine using the blade

\*\* Value with canopy

# HYDRAULIC SYSTEM

Pump capacity, max.	21 l/min
Working pressure	220 bar
Gear pump	
LS-control and load independent flow distribution (LIFD) for all working movements and travel drive	
Simultaneous independent control of all functions	
All excavator movements servo-controlled, ISO	
All functions are proportionally controllable	
Hydraulic oil cooler	
Full flow filtration through return filter	
Cylinders for boom, dipper arm and articulation with end position damping at both ends	
Bucket retract function with end-position damping	
Safety shutdown activated by exit barrier	
Additional control circuit available as option, control via foot pedal	
Additional control circuit with bypass for pressure-reduced return quantity	
Hydraulic power to the couplings:	
Pump capacity	21 l/min
Max. working pressure	220 bar

# CANOPY (STANDARD)

Robust steel pipe construction. 4 support members for the best all-round visibility
1 working floodlight front left
FOPS (acc. to ISO 3449), ROPS and TOPS (acc. to ISO 12117) certified
Operator's seat (standard version), imitation leather:
Longitudinal and back tilt adjustment
Continuous weight adjustment as per operators weight
Safety belt
Armrests height adjustable without tools
Large lockable storage compartment under the operator's seat
Storage pocket behind the operator's seat
Display, fuel gauge, hour meter and warning lights
Yellow beacon, immobilizer (anti-theft device), working floodlights prepared for optional installation
Easy and quick change of canopy to cab and vice-versa (< 1 hour)

# CAB

Spacious, sound-insulated full-vision steel cab, FOPS*** (acc. to ISO 3449), ROPS and TOPS (acc. to ISO 12117) certified
Very good all-round visibility, lean vertical support members
Safety glass
Front window supported by pneumatic springs, slidable under cab roof
Fixed window part without frame which obstructs the forward view
Door with large access on left hand side
Foldable console on left hand side for large entry access
Right door as emergency exit
Matching locks of hood, ignition and tank cap
Central connector for electrical cable
Wiper washer with wiper for windscreen
Interior light, coat hook
Operator's seat (standard version), imitation leather:
Longitudinal and back tilt adjustment
Continuous weight adjustment as per operators weight
Safety belt
Armrests height adjustable without tools
Cables for radio installation kit
Preparation for antenna

Large storage compartment under the operator's seat	
Heating (water) with 2-speed fan and 4 adjustable exhaust nozzles	
Temperature controller in cab	
Storage pocket behind the operator's seat	
Storage compartment for mobile phone (near 12V outlet)	
1 left-hand outside rear-view mirror, foldable in front of windshield	
1 working floodlight front left as standard	
Display, fuel gauge, hour meter and warning lights	
Fuse box easily accessible from outside of the cab	
Very good ergonomics	
Ergonomically arranged dozer blade lever	
Yellow beacon, radio, immobilizer (anti-theft device), working floodlights prepared for optional installation	
Additional weight of cab	80 kg
*** FOPS-approved only with skylight guard (optional)	

# CRANE TRANSPORT


Crane lifting beam for cab and canopy
---------------------------------------

# SOUND LEVEL VALUES

Noise emission ambience L <sub>WA</sub> cab / canopy	93 / 93 dB (A)
Noise emission cab L <sub>PA</sub> cab / canopy	80 / 80 dB (A)
Sound level values measured in compliance with Directive 2000/14/EC and EN474	


# VIBRATION VALUES

Effective values of acceleration for whole body	less than 0.5 m/s <sup>2</sup>
Effective values of acceleration for hand-arm	less than 2.5 m/s <sup>2</sup>
Vibration values in compliance with Directive 2006/42/EC and EN474	

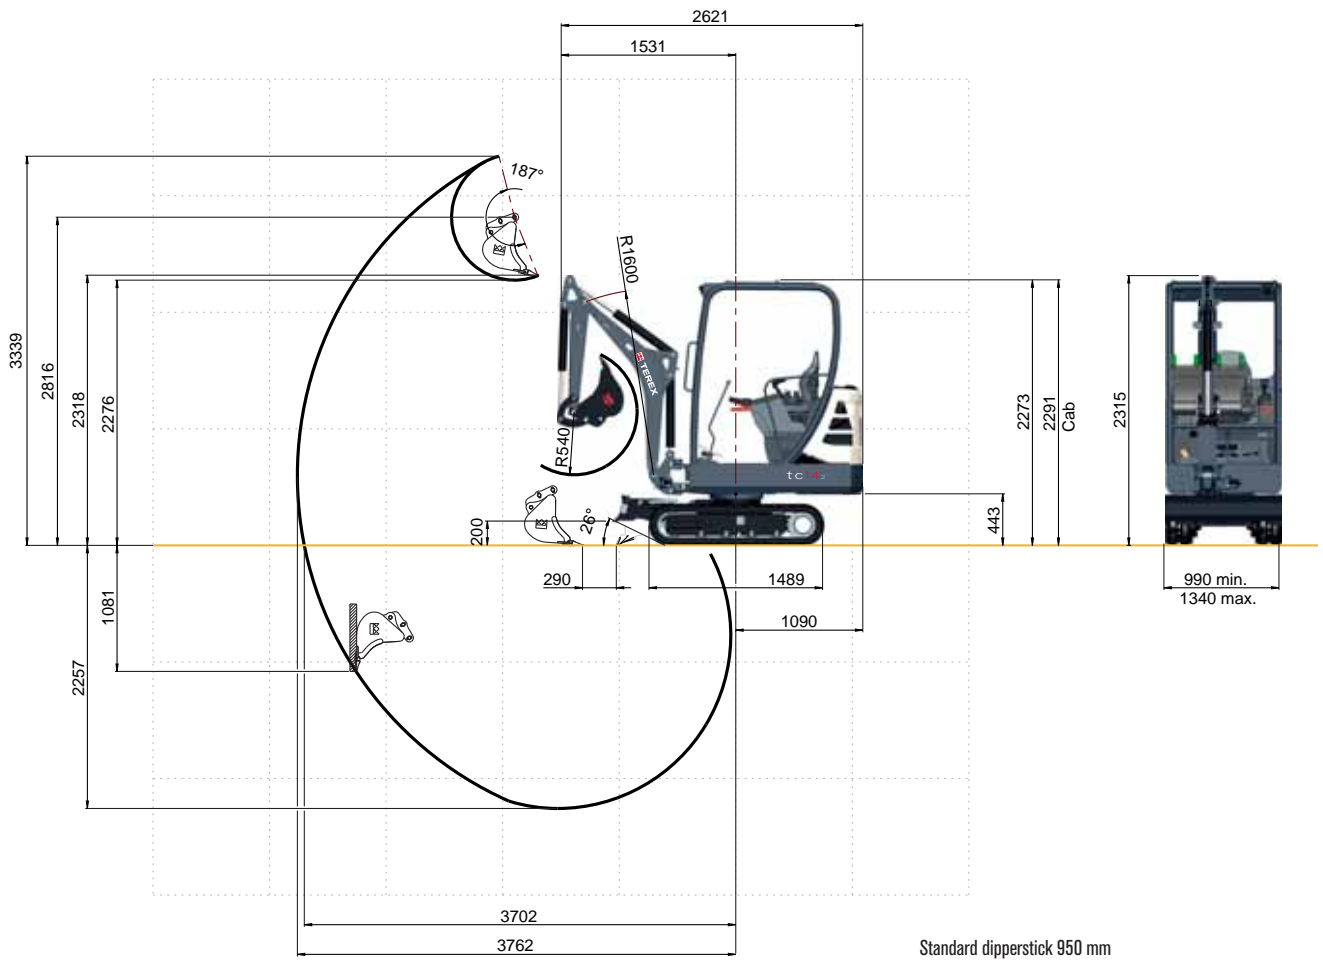


## DIMENSIONS



**Fig. 1, 2:**  
Excavation within the entire width of the machine

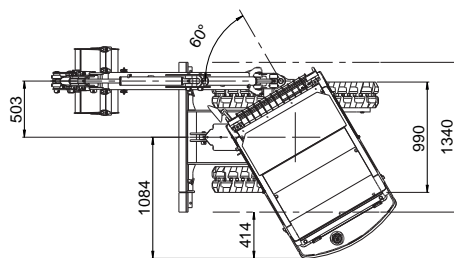



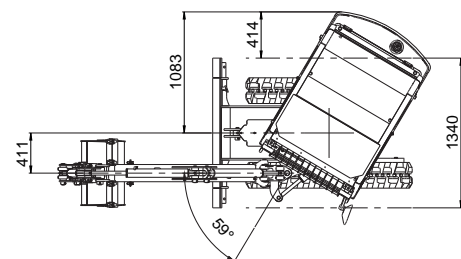



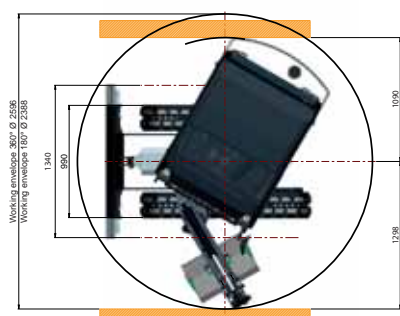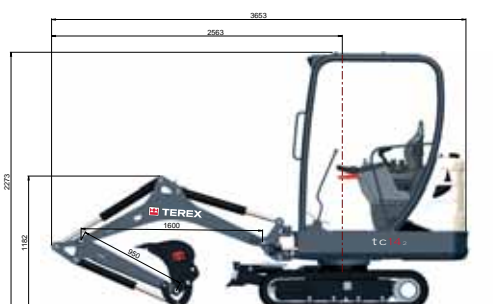





















**Fig. 3:**  
Transport position - trailer transport



**Fig. 4:**  
Working envelope



## LIFTING CAPACITIES

Bucket hinge height		Load radius from center of ring gear																			
Dipperstick 950 mm		1.5 m				2.0 m				2.5 m				3.0 m				3.25 m			
		UR	UE	UR	UE	UR	UE	UR	UE	UR	UE	UR	UE	UR	UE	UR	UE	UR	UE	UR	UE
																					
2.0 m		-	-	-	-	0.57	0.57	0.45	0.45	0.36	0.36	0.26	0.36	0.33	0.33	0.21	0.29	-	-	-	-
		-	-	-	-	0.44	0.44	0.44	0.44	0.33	0.33	0.26	0.36	0.20	0.20	0.20	0.29	-	-	-	-
1.0 m		0.80	0.80	0.50	0.86	0.53	0.53	0.35	0.77	0.43	0.43	0.24	0.36	0.35	0.35	0.18	0.27	0.32	0.32	0.17	0.24
		0.76	0.76	0.48	0.86	0.50	0.50	0.34	0.77	0.30	0.30	0.24	0.35	0.23	0.23	0.18	0.26	0.21	0.21	0.16	0.23
0.0 m		0.90	0.90	0.47	0.64	0.62	0.62	0.30	0.45	0.44	0.44	0.23	0.34	0.32	0.32	0.18	0.26	0.28	0.28	0.17	0.29
		0.57	0.57	0.44	0.64	0.39	0.45	0.30	0.44	0.29	0.29	0.22	0.33	0.22	0.22	0.17	0.26	0.21	0.21	0.16	0.23
-0.75 m		0.68	0.68	0.41	0.79	0.50	0.50	0.29	0.51	0.35	0.35	0.22	0.37	0.26	0.23	0.18	0.23	-	-	-	-
		0.56	0.56	0.39	0.77	0.38	0.39	0.29	0.51	0.28	0.28	0.21	0.37	0.26	0.23	0.17	0.23	-	-	-	-

All values in tons (t) were determined acc. to ISO 10567 and include a stability factor of 1.33 or 87% of the hydraulic lifting capacity. All values were determined with quick-attach system but without bucket. In case of mounted-on work attachments, the deadweights of the work attachments must be deducted from the permissible operating loads

Working equipment: Rubber tracks

Abbreviations: UR = Undercarriage retracted, UE = Undercarriage extended

## WORK ATTACHMENTS

### BUCKETS

Bucket, QAS	250 mm wide, capacity 21 l, 27 kg
Bucket, QAS	300 mm wide, capacity 26 l, 30 kg
Bucket, QAS	400 mm wide, capacity 37 l, 35 kg
Bucket, QAS	500 mm wide, capacity 48 l, 41 kg
Bucket, QAS	600 mm wide, capacity 59 l, 46 kg
Ditch-cleaning bucket, QAS	1000 mm wide, capacity 91 l, 79 kg
Swing bucket, QAS	1000 mm wide, capacity 49 l, 79 kg

### GRABS

Clamshell grab GL 1250, grab swing brake	set of shells 250 mm wide, capacity 45 l
Ejector	

### OTHER WORK ATTACHMENTS

Hydraulic hammer	Cutting unit
Augers	Quick-change adapter for hydraulic hammer
Bolt-on load hook for bucket rod	Further work attachments available on request

## OPTIONAL EQUIPMENT

### CRAWLER CHAIN OPTIONS

Rubber tracks (long pitch), 230 mm wide

### HYDRAULIC SYSTEM

Additional control circuit, control via foot pedal      Biodegradable hydraulic oil / ester-based HLP 68 (Panolin)

### CAB

Rain guard	FOPS - skylight guard
Lighting package: Cab-mounted working flood-light front right and rear right, boom-mounted working floodlight, yellow beacon	Radio set installation kit (speakers)
Fire extinguisher, ABC powder 2 kg	

### OTHER OPTIONAL EQUIPMENT

Mechanical quick-attach system	Crane lifting gear
Quick-attach system, mechanical (genuine Lehnhoff system), type MS01	Special colour options
Further optional equipment available on request	

[www.terex.com/construction](http://www.terex.com/construction)

Effective Date: April 2016. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product. Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. "Terex" is a registered trademark of Terex Corporation in the USA and many other countries. Copyright © 2016 Terex Corporation (R1\_010416) Ref. no.: TEREX850EN

Terex Compact Germany GmbH  
Kraftwerkstrasse 4  
D-74564 Crailsheim  
Phone: +49 (0)7951 / 9357-0 Fax: +49 (0)7951 / 9357-671  
construction@terex.com      www.terex.com



**TEREX®**

**WORKS FOR YOU.™**